

## MS-7IPV8060ECAR-B

6MP Fisheye Network Camera

### Key Features

- 1/2.8" progressive scan CMOS
- 25/30fps @ 6MP(2560×2560)
- Multi Dewarping modes and front end image correction
- Support human and vehicle detection
- Intelligent analysis: intrusion, single line crossing, double line crossing, loitering, wrong-way, people counting, smart motion detection and heat map
- True WDR, 3D DNR, ROI, Defog, HLC
- Built-in microphone
- Smart IR distance up to 15 m
- IP66



## Specification


Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Max. Resolution	2560(H) × 2560(V)
Electronic Shutter	Auto/Manual, 1/5 to 1/20,000s
Min. illumination	Color: 0.01 Lux @ (F2.0, AGC ON) , B/W: 0 Lux with IR
Day & Night	Auto (ICR)
IR Distance	Up to 15 m (49.2 ft.)
IR On/Off Control	Auto/ Manual
Lens	
Lens Type	Fixed Lens
Iris	Fixed Iris
Focal Length	1.5 mm
F Number	F2.0
Angle of View	180° × 180°
Video	
Streaming Capability	2 Streams
Main Stream	<b>One-Channel:</b> Fisheye View: 2560×2560, 2048×2048, 1280×1280, 1280×960 @25/30fps 180 Panorama View: 2560×640, 1920×480, 1280×960 @25/30fps 360 Panorama View: 2560×1280, 1920×960, 1280×960 @25/30fps 4PTZ View: 2048×1536, 1920×1440, 1280×960 @25/30fps Fisheye + 3PTZ View: 2048×1536, 1920×1440, 1280×960 @25/30fps <b>Multi-Channel:</b> 1520×1520, 960×960, 720×720, 640×640 @25/25fps
Sub Stream	<b>One-Channel:</b> Fisheye View: D1, 640×640, 480×480 @25/30fps 180 Panorama View: 832×208, D1 @25/30fps 360 Panorama View: 640×320, D1 @25/30fps 4PTZ View: 640×480, D1, 320×240 @25/30fps Fisheye + 3PTZ View: 640×480, D1, 320×240 @25/30fps <b>Multi-Channel:</b> 640×640 @25/30fps
Bit Rate Control	CBR/VBR
Bit Rate	One-Channel: Stream1: 500Kbps to 12Mbps Stream2: 200Kbps to 8Mbps Multi-Channel: Stream1: 100Kbps to 12Mbps Stream2: 100Kbps to 6Mbps
Smart Encoder	Support
Region of Interest (ROI)	Support (Single-channel and fisheye mode)
Image	
Image Adjustment	Brightness, Sharpness, Contrast, Saturation adjustable
Mirror	Support
White Balance	Auto/Manual
Day/Night Setting	Auto, Day, Night, Time
Smart IR	Support
Noise Reduction	2D/3D DNR
Image Enhancement	HLC, BLC, Defog
Wide Dynamic Range	True WDR

# MoviSight

S/N Ratio	55dB
Motion Detection	Support
Privacy Masking	Support (Single-channel and fisheye mode)
<b>Audio</b>	
Compression	G.711A, G711U, RAW_PCM
Bit Rate	16Kbps
<b>Smart Function</b>	
Multi-Object Detection	Supports human and vehicle detection
Intelligent Analysis	Intrusion, Single line crossing, Double line crossing, Loitering, Wrong-way, Smart motion detection. (Support available only in single-channel mode) Support alarm triggering by specified target types (human and vehicle).
People Counting	Support
Heat Map	Support
<b>Fisheye Display</b>	
Mount Type	Ceiling Mount, Wall Mount, Table Mount
Decoding Mode	On-board Dewarping/Client-side Dewarping
Display Mode	12 display modes in total Client-side Dewarping: fisheye view, fisheye view + 3PTZ, fisheye view + 8PTZ, 4PTZ, cylinder, 180 panorama view, 360 panorama view, 360 panorama + PTZ, 360 panorama + 3PTZ, 360 panorama + 6PTZ, 360 panorama + 8PTZ, half sphere On-board Dewarping: Fisheye view, 360 panorama view, 4PTZ, 180 panorama view, fisheye + 3PTZ
<b>Network</b>	
Protocols	IPv4/IPv6, TCP/IP, HTTP, HTTPS, UPnP, UDP/IP, RTSP/RTCP/RTP, IGMP/Multicast, SMTP, DHCP, NTP, DNS, QoS, SNMP, 802.1x, UDP, ICMP, ARP, TLS
Interoperability	ONVIF, SDK
Streaming Method	Multicast
Max. User Access	10 Users
Web Viewer	<IE11, Chrome, Firefox
Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian. Default: English
<b>Interface</b>	
Network Interface	1 Ethernet (10/100 Base-T) RJ-45 Connector
Built-in Microphone	Support
Audio Interface	1ch Input, 1ch Output
Alarm Interface	1ch Input, 1ch Output
Reset Button	Support
SD Card Slot	Built-in, up to 1TB
<b>Electrical</b>	
Power Supply	DC12V (-15% to +20%)/PoE (IEEE 802.3af)
Power Consumption	Max 9 W
Operating Temperature	-30°C to 60°C (-22°F to 140°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP66
Certifications	CE/FCC
Casing	Metal
Dimensions	Φ130 × 38.3 mm (Φ5.12" × 1.51")
Net Weight	0.5 kg (1.10 lb.)

# MoviSight

## Dimensions (mm)

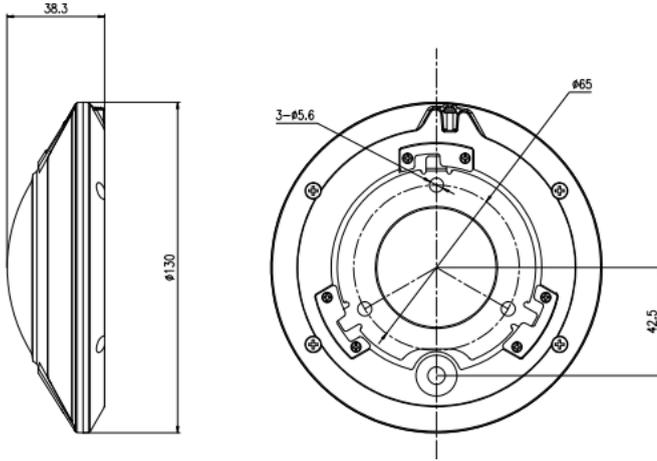

## Accessories

### Optional:



MS-7CBK645E  
Junction Box



MS-7CBK201A  
Pendant Cap



MS-7CBK402  
Pendant Mount



MS-7CBK501  
Wall Mount



MS-7CBK502  
Wall Mount



MS-7CBK101  
Pole Mount



MS-7CBK102  
Corner Mount